



Brass Non Return Check Valve (Swing Disc)


SUPERPUMP BRASS CHECK VALVE (NRV) - FULL PRODUCT RANGE & SPECIFICATIONS

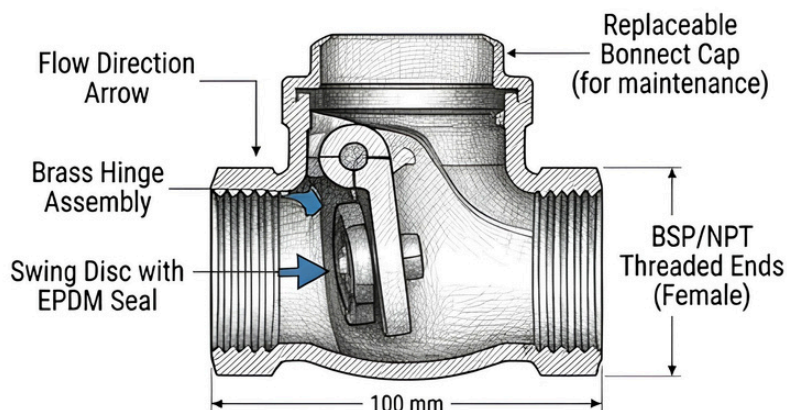



1/2" (DN15) Valve



3/4" (DN20) Valve



1" (DN25) Valve





SPECIFICATIONS

Valve Type : Check Valve
Body Material : Brass
Size : 73 inch (DN32)
Connection : PN16
Pressure Rating : 10°C to 120°C
Operation : Automatic
Media : Water, Oil, Gas, Air

FEATURES

- ✓ Prevents Backflow
- ✓ Automatic Operation
- ✓ Burstable Construction
- ✓ Low Pressure Drop
- ✓ Leak Proof Design
- ✓ Corrosion Resistant
- ✓ Long Service Life

2" (DN50) Valve




SPECIFICATIONS

Valve Type : Check Valve
Body Material : Brass
Size : 77 inch (DN32)
Connection : Female (BSP)
Pressure Rating : PN16
Temperature : -10°C to 120°C
Operation : Automatic
Media : Water, Oil, Gas, Air

FEATURES

- ✓ Prevents Backflow
- ✓ Automatic Operation
- ✓ Burstable Construction
- ✓ Low Pressure Drop
- ✓ Leak Proof Design
- ✓ Corrosion Resistant
- ✓ Long Service Life

3" (DN80) Valve




SPECIFICATIONS

Valve Type : Brass
Body Material : Brass
Size : 77 inch
Connection : PN16
Pressure Rating : PN16
Temperature : -10°C
Operation : Automatic
Media : Media

FEATURES

- ✓ Prevents Backflow
- ✓ Automatic Operation
- ✓ Burstable Construction
- ✓ Low Pressure Drop
- ✓ Leak Proof Design
- ✓ Corrosion Resistant
- ✓ Long Service Life

4" (DN100) Valve



SPECIFICATIONS

Valve Type : Check Valve
Body Material : Brass
Size : 6" Inch
Connection : PN16
Pressure Rating : PN16
Temperature : -100 to 120°C
Operation : Automatic
Media : Media


FEATURES

- ✓ Prevents Backflow
- ✓ Automatic Operation
- ✓ Burstable Construction
- ✓ Low Pressure Drop
- ✓ Leak Proof Design
- ✓ Corrosion Resistant
- ✓ Long Service Life

SUMMARY SPECIFICATIONS

Valve Size	Connection	Body Material	Cracking Pressure (bar)	Length (mm)	Height (mm)
1/2" (DN15)	BSP (Female)	Brass	~0.05	65	45
3/4" (DN20)	BSP (Female)	Brass	~0.04	75	55
1" (DN25)	BSP (Female)	Brass	~0.03	100	70
1-1/4" (DN32)	BSP (Female)	Brass	~0.02	115	80
2" (DN50)	BSP (Female)	Brass	~0.01	160	110
3" (DN80)	BSP (Female)	Brass	~0.01	210	140
4" (DN100)	BSP (Female)	PN16	~0.005	260	175

Prevents Siphon and Backflow

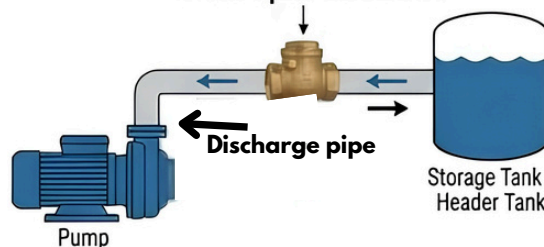

RELIABLE BACKFLOW PREVENTION
Keeps your system sealing.



LOW-PRESSURE OPERATION
Prevents pump efficiency.



RELIABLE BACKFLOW PREVENTION
Keeps your system pressurized.



ZERO-MAINTENANCE AUTOMATIC OPERATION
Pure gravity and hydraulic forces.



LOW PRESSURE DROP
Maximizes pump efficiency.



LEAK-PROOF DESIGN
Solid seat ensures sealing.



SUPERPUMP
water pumps

CHECK VALVE

