


STAINLESS STEEL SERIES

Nominal Diameter : **6"**Nominal Flow : **22m³/h**Outlet Size : **2½"/3"*****

Performance Table

DIMENSIONS & WEIGHT

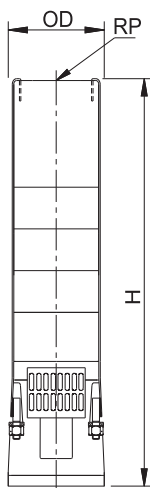

PUMP MODEL	REQUIRED MOTOR POWER		*NO OF CABLE GUARD	DIMENSIONS (mm)			APPROX NETT. WEIGHT (kg)
	kW	HP		OD	RP	H	
S6S-22/05	3.7	5	1	139	65/80	527	11.5
S6S-22/06	4.5	6	1	139	65/80	574	12.5
S6S-22/07	5.5	7.5	1/2	139/143	65/80	621	13.5
S6S-22/08	5.5	7.5	1/2	139/143	65/80	668	14.5
S6S-22/09	7.5	10	1/2	139/143	65/80	715	15.5
S6S-22/10	7.5	10	1/2	139/143	65/80	762	16.5
S6S-22/11	9.3	12.5	1/2	139/143	65/80	809	17.5
S6S-22/12	9.3	12.5	1/2	139/143	65/80	856	18.5
S6S-22/13	11	15	1/2	139/143	65/80	903	19.5
S6S-22/14	11	15	1/2	139/143	65/80	950	20.5
S6S-22/15	11	15	1/2	139/143	65/80	997	21.5
S6S-22/16	13	17.5	1/2	139/143	65/80	1044	22.5
S6S-22/17	13	17.5	1/2	139/143	65/80	1091	23.5
S6S-22/18	13	17.5	1/2	139/143	65/80	1138	24.5
S6S-22/19	15	20	1/2	139/143	65/80	1185	25.5
S6S-22/20	15	20	1/2	139/143	65/80	1232	26.5
S6S-22/21	15	20	1/2	139/143	65/80	1279	27.5
S6S-22/22	18.5	25	1/2	139/143	65/80	1326	28.5
S6S-22/23	18.5	25	1/2	139/143	65/80	1373	29.5
S6S-22/24	18.5	25	1/2	139/143	65/80	1420	30.5
S6S-22/25	18.5	25	1/2	139/143	65/80	1467	31.5
S6S-22/26	22	30	1/2	139/143	65/80	1514	32.5
S6S-22/28	22	30	1/2	139/143	65/80	1608	34.5
S6S-22/30	22	30	1/2	139/143	65/80	1702	36.5
S6S-22/32	26	35	1/2	139/143	65/80	1769	38.5
S6S-22/34	26	35	1/2	139/143	65/80	1890	40.5
S6S-22/36	26	35	1/2	139/143	65/80	1984	42.5
S6S-22/38	30	40	1/2	139/143	65/80	2078	44.5
S6S-22/40	30	40	1/2	139/143	65/80	2172	46.5
S6S-22/42	30	40	1/2	139/143	65/80	2266	48.5
S6S-22/44	37	50	1/2	139/143	65/80	2360	50.5
S6S-22/46	37	50	1/2	139/143	65/80	2454	52.5
S6S-22/50	37	50	1/2	139/143	65/80	2642	54.5

* 1 denotes Single Cable Guard (D.O.L - 3 wire) and 2 denotes Double Cable Guard (S.D - 6 wire). Please specify preference, while placing order.

**Optional outlet Size.

Available types of materials of construction : S (S.S-304) and N (S.S-316). In case of M.O.C Type - N the third digit of the pump model "S" will be replaced with "N". The given performance curves are same for Type - S & N.


In view of continuous developments, the information / descriptions / specifications / illustrations are subject to change without notice.

STAINLESS STEEL SERIES

Nominal Diameter : **6"**Nominal Flow : **22m³/h**Outlet Size : **2½"/3"*****

Performance Table

PUMP MODEL	MOTOR kW	lps	0	2.77	3.3	3.89	4.44	5	5.55	6.11	6.67	7.22	7.77
		m ³ /h	0	10	12	14	16	18	20	22	24	26	28
S6S-22/05	3.7	TOTAL MANOMETRIC HEAD IN METRES - (COLUMN WATER)	57	52	50	49	48	46	43	40	35	30	24
S6S-22/06	4.5		69	62	60	58	56	54	49	45	41	35	27
S6S-22/07	5.5		80	71	69	66	64	60	57	52	47	40	32
S6S-22/08	5.5		92	84	81	78	76	72	68	62	55	47	38
S6S-22/09	7.5		100	94	91	89	86	82	77	71	64	55	45
S6S-22/10	7.5		114	104	101	98	95	92	86	79	71	61	50
S6S-22/11	9.3		125	114	110	107	104	100	95	87	78	68	57
S6S-22/12	9.3		137	126	123	120	116	110	105	95	85	74	62
S6S-22/13	11		150	139	135	131	125	120	113	104	94	81	69
S6S-22/14	11		160	148	145	141	136	130	121	111	100	88	75
S6S-22/15	11		171	159	155	152	147	140	131	121	109	95	80
S6S-22/16	13		182	169	166	162	156	150	140	130	116	101	85
S6S-22/17	13		192	180	175	171	165	158	149	138	125	108	90
S6S-22/18	13		207	190	186	182	176	170	160	147	132	115	95
S6S-22/19	15		218	201	196	192	185	178	169	155	140	120	100
S6S-22/20	15		230	212	207	202	195	188	178	165	146	126	106
S6S-22/21	15		243	224	219	213	205	198	187	174	155	135	112
S6S-22/22	18.5		254	235	230	224	217	208	195	181	164	142	117
S6S-22/23	18.5		265	246	241	235	226	217	205	189	170	147	121
S6S-22/24	18.5		277	256	250	244	235	225	214	197	177	154	127
S6S-22/25	18.5		290	265	260	253	244	234	220	203	183	159	131
S6S-22/26	22		299	277	270	263	254	242	228	210	190	165	137
S6S-22/28	22		314	290	284	275	265	254	238	220	199	174	144
S6S-22/30	22		338	305	298	290	280	269	253	234	210	180	149
S6S-22/32	26		362	329	320	310	300	289	270	250	222	192	160
S6S-22/34	26		382	351	344	333	321	308	289	267	238	205	170
S6S-22/36	26		406	375	364	352	340	326	305	280	250	218	181
S6S-22/38	30		430	395	385	372	360	341	320	293	263	230	192
S6S-22/40	30		455	414	402	390	378	360	339	309	277	240	203
S6S-22/42	30		476	434	423	410	397	378	352	323	290	253	216
S6S-22/44	37		498	454	444	430	415	397	370	340	305	268	228
S6S-22/46	37		535	482	470	458	440	419	390	359	322	280	240
S6S-22/50	37		568	511	499	482	454	440	415	383	349	309	263

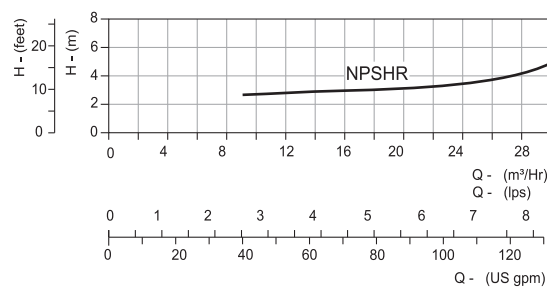

**Optional outlet Size.


STAINLESS STEEL SERIES

Nominal Diameter : **6"**

Nominal Flow : **22m³/h**

Outlet Size : **2½"/3"***

Performance Curves

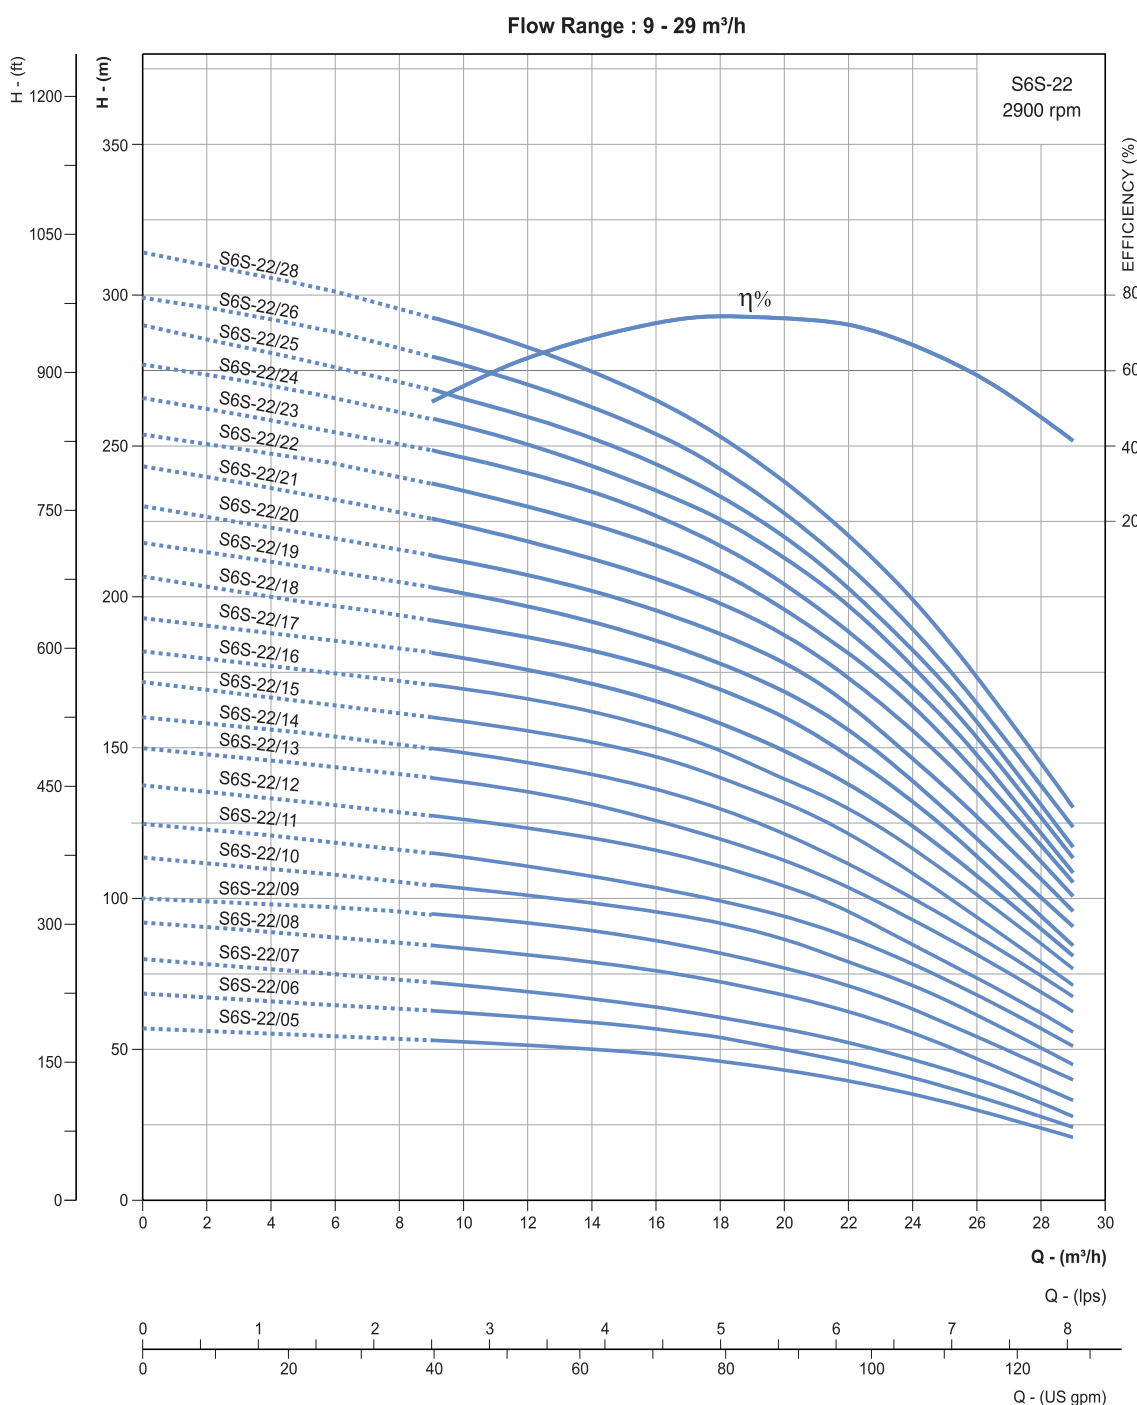

** Optional outlet Size.

Refer General Information for performance curve conditions and for other details.
Curve tolerance according to ISO : 9906, Grade - 3B


STAINLESS STEEL SERIES

Nominal Diameter : **6"**

Nominal Flow : **22m³/h**

Outlet Size : **2½"/3"*****

Performance Curves

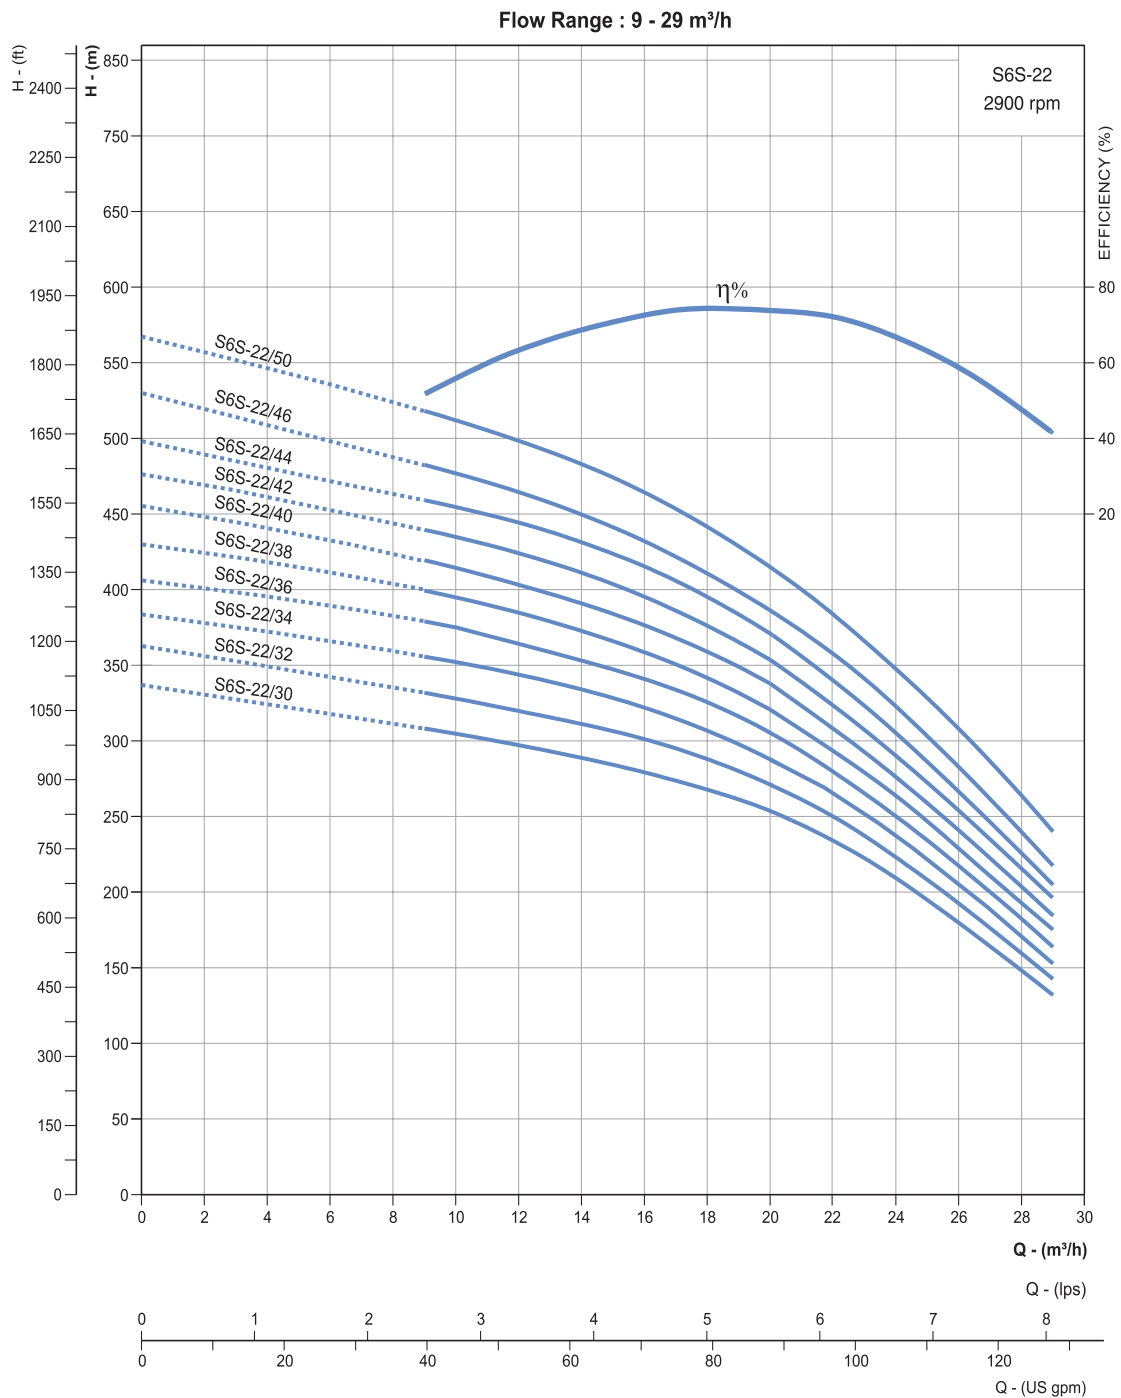

*** Optional outlet Size.

Refer General Information for performance curve conditions and for other details.

Curve tolerance according to ISO : 9906, Grade - 3B